

NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIAL SPECIFICATIONS:
 BODY: BRASS PER ASTM B196
 CONTACT: BERYLLIUM COPPER PER ASTM B196
 INSULATOR: TEFLON PER ASTM D1710
 CE INSULATOR: ULTEM1000 OR LCP PER ZENITE 6130L X BK010

2. FINISH SPECIFICATIONS:
 CENTER CONTACT: .000050 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290(ROHS).
 BODY: .000015 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290(ROHS).

3. ELECTRICAL SPECIFICATIONS:
 IMPEDANCE: 75 OHM
 FREQUENCY RANGE: DC TO 6GHz.
 RETURN LOSS: <-25 dB.

4. COMPLIANT TO SMPTE 424M (3G-SDI) STANDARD

REV	DESCRIPTION	BY DATE	APPD
C	REVISED PER ER042797	TZ 07/06/12	CY

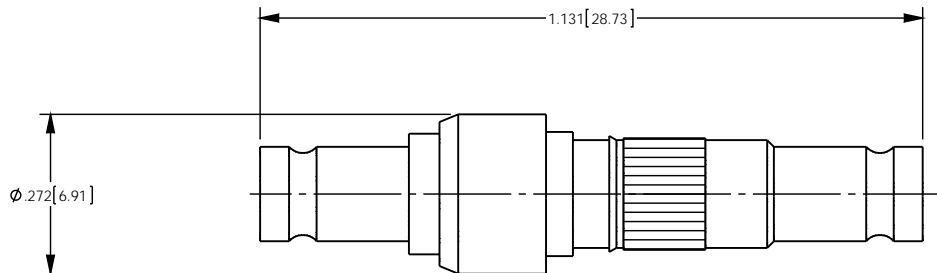

CATALOG P/N: 034G-034-00003H

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: XX (X.X) ± .01 (0.3) .XXX (X.XX) ± .005 (0.13) .XXXX (X.XXX) ± .XXXX ANGLES: ± 2° SCALE: 4:1				 by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING			THIRD ANGLE	1.0/2.3 ADAPTER, F-F, 75 OHM (ROHS COMPLIANT)	
DRAWN	DATE	APPROVED	DATE		
CY	08/10/11	DG:m	08/11/11		
APPROVED	DATE	APPROVED	DATE		
XXX	XX/XX/XX	XXX	XX/XX/XX		
A				SD034G-034-00003H	SHT OF REV
				1	1 C