




NOTES: UNLESS OTHERWISE SPECIFIED

- FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.
- MATERIAL SPECIFICATIONS:
BAYONET SLEEVE, BODY, CONTACT, FERRULE: BRASS PER ASTM B16 .
INSULATOR: TEFLON PER ASTM D1710.
SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194.
GASKET: SILICONE RUBBER.
- FINISH SPECIFICATIONS:
BAYONET SLEEVE, BODY : .000100MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734 (ROHS).
CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER AMS-QQ-N-290 (ROHS) .
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER
.000050 MIN COPPER PER ASTM B734 (ROHS).
- CONTACT AND FERRULE SHIPPED LOOSE.
- FOR USE WITH BELDEN CABLE 1855A OR EQUIVALENT.
- FOR CRIMPING USE KINGS KTH-5000 & KTH-5003 OR KTH-1000 & KTH-2025 (.041AND .178 HEX CAVITY).
- ASSEMBLE TO CABLE SEE 3-661-1.
- THESE AREA DON'T HAVE WHITE MARKING.
- ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC - 12 GHz
RETURN LOSS: -30 dB MAX TO 3 GHz
-20 dB MAX TO 6 GHz
- COMPLIANT TO 3G/6G/12G-SDI SMPTE REQUIREMENTS.

REV	DESCRIPTION	BY DATE	APPD
L	ER072090	DCam 08/15/08	DCAM



P/N	DESCRIPTION	QTY
2065-E00-C7202N	SINGLE PACK	1
2065-E00-C7202NU	BULK PACK	100

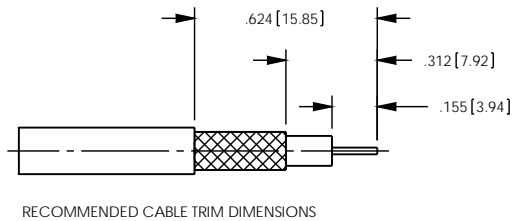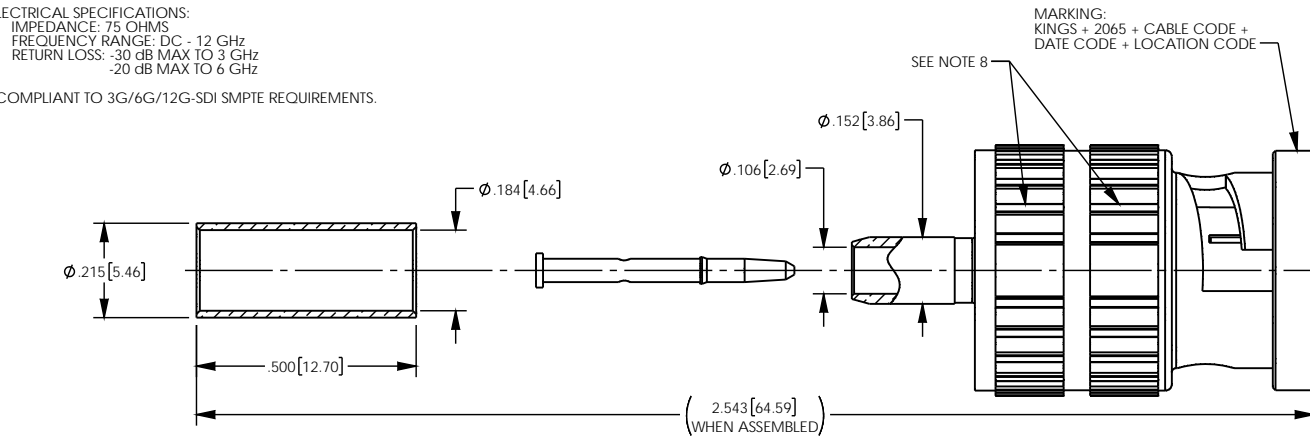

CATALOG P/N: 2065-E00-C7202N

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: XX (X.X) ± .01 (0.3) XXX (X.XXX) ± .005 (0.13) XXXX (X.XXXX) ± .0025 (0.064) ANGLES: ± 2° SCALE: 2.5:1		 by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING		 BNC 75 OHM PLUG FOR BELDEN 1855A OR EQUIVALENT (ROHS COMPLIANT)	
DRAWN Cy	DATE 07/24/08	APPROVED DCam	DATE 08/05/08
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX
A		SD2065-E00-C7202N	SH1 1 OF 1 REV L