



US009039424B2

(12) **United States Patent**
Camelio et al.

(10) **Patent No.:** **US 9,039,424 B2**
(45) **Date of Patent:** **May 26, 2015**

(54) **CLOSED ENTRY DIN JACK AND CONNECTOR WITH PCB BOARD LOCK**

USPC 439/63, 581, 578, 582
See application file for complete search history.

(71) Applicant: **Winchester Electronics Corporation,**
Wallingford, CT (US)

(56)

References Cited

(72) Inventors: **David J. Camelio,** Foxboro, MA (US);
John E. Benham, Torrington, CT (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Winchester Electronics Corporation,**
Middlebury, CT (US)

4,281,555	A	8/1981	Schluntz et al.	
4,611,878	A	9/1986	Hall et al.	
6,164,977	A *	12/2000	Lester	439/63
6,227,908	B1	5/2001	Aumeier et al.	
6,695,636	B2 *	2/2004	Hall et al.	439/352
6,719,586	B2 *	4/2004	Weidner	439/581
6,780,051	B2 *	8/2004	Otsu	439/578
6,913,488	B2 *	7/2005	Motojima et al.	439/607.01
7,909,615	B1	3/2011	Yasumura et al.	
8,550,855	B2 *	10/2013	Zhang et al.	439/636

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 272 days.

(21) Appl. No.: **13/655,718**

OTHER PUBLICATIONS

(22) Filed: **Oct. 19, 2012**

International Search Report and Written Opinion issued on Jan. 11, 2013 in corresponding International application No. PCT/US2012/060993, 14 pages.

(65) **Prior Publication Data**

US 2013/0102187 A1 Apr. 25, 2013

* cited by examiner

Related U.S. Application Data

(60) Provisional application No. 61/548,887, filed on Oct. 19, 2011.

Primary Examiner — Xuong Chung Trans

(74) *Attorney, Agent, or Firm* — Rothwell, Figg, Ernst & Manbeck, P.C.

(51) **Int. Cl.**

H01R 12/00	(2006.01)
H01R 24/50	(2011.01)
H01R 13/631	(2006.01)
H01R 24/44	(2011.01)

(57)

ABSTRACT

(52) **U.S. Cl.**


CPC **H01R 24/50** (2013.01); **H01R 13/631** (2013.01); **H01R 24/44** (2013.01)

The present invention provides a DIN jack including a dielectric shroud defining a closed entry lead-in that helps prevent damage caused by a bent or misaligned signal pin of a mating DIN plug without adversely affecting the performance of the DIN connector. The present invention also provides a board lock feature that may be used to hold a DIN jack securely to a circuit board during the manufacturing process.

(58) **Field of Classification Search**

CPC .. H01R 24/50; H01R 9/0515; H01R 23/7073; H01R 24/44; H01R 23/6873; H01R 12/721; H01R 12/57

30 Claims, 7 Drawing Sheets

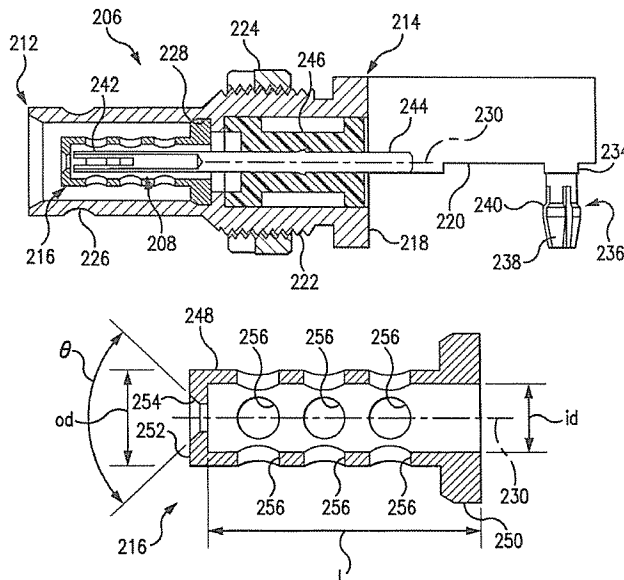

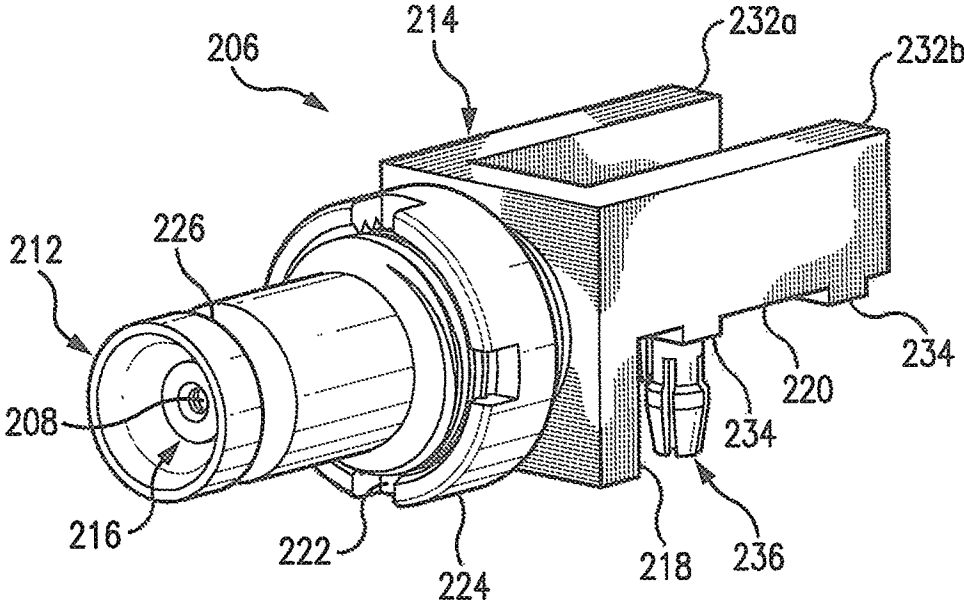


FIG. 2

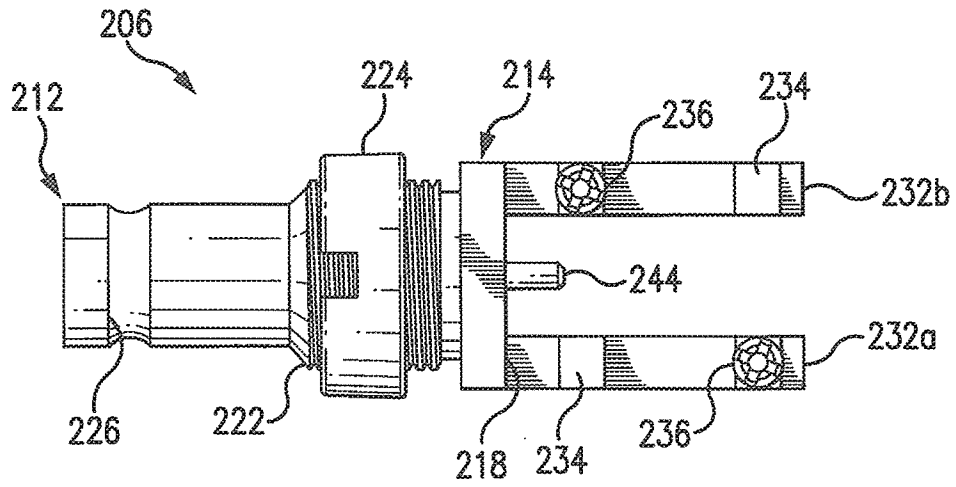


FIG. 5

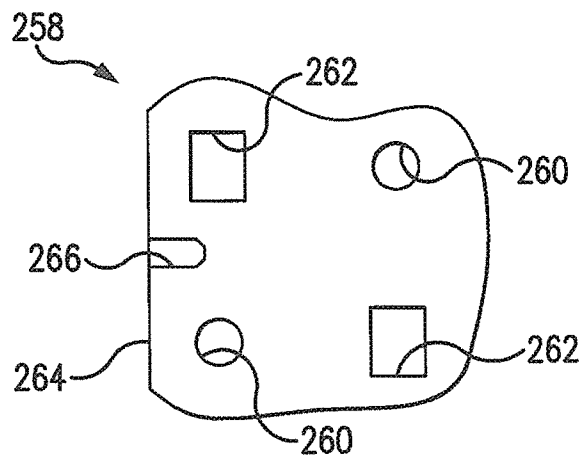


FIG. 6

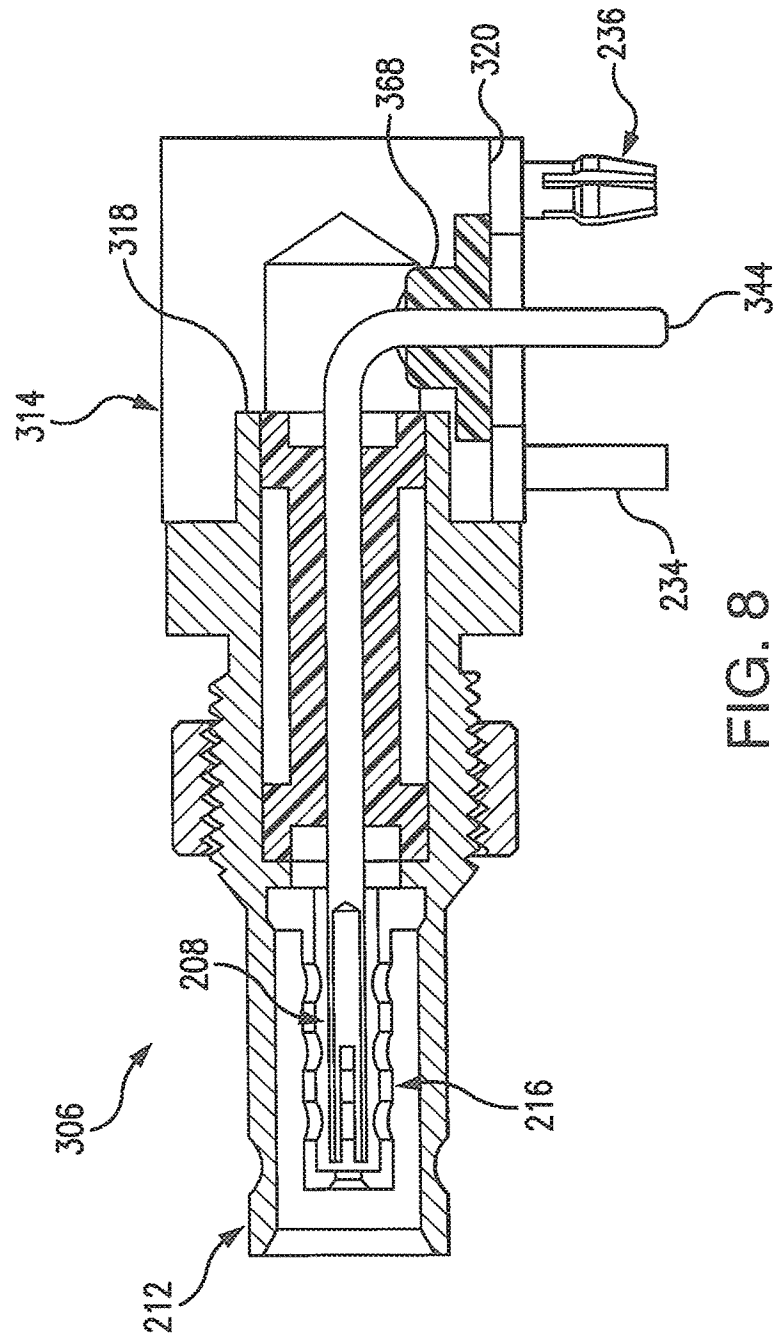


FIG. 8

1

CLOSED ENTRY DIN JACK AND CONNECTOR WITH PCB BOARD LOCK

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application Ser. No. 61/548,887, filed on Oct. 19, 2011, the disclosure of which is incorporated herein in its entirety.

FIELD OF THE INVENTION

The present invention relates generally to electrical connectors.

BACKGROUND

Electrical connectors designed to interface in compliance with standards established by the Deutsches Institut für Normung, a German standards organization, are referred to as DIN connectors. FIG. 1 shows a standard DIN 1.0/2.3 connector **100**. The DIN connector **100** includes a DIN plug **102** with a signal pin **104** and a DIN jack **106** with a mating socket contact **108** axially aligned with the signal pin. Signal pin **104** and socket contact **108** are disposed within respective hollow, cylindrical shields **110**, **112** that mate telescopically. Problems have been noted when this type of connector is miniaturized for use in a large array of connectors. For example, if the signal pin of a DIN plug is bent or misaligned even a small amount (e.g., more than 0.006"), it can brush by or butt against and damage the DIN jack with resulting signal loss and reliability problems.

SUMMARY

Embodiments of a first aspect of the present invention provide a jack (e.g., a DIN jack or other jack) including a tubular socket disposed coaxially within a hollow cylindrical shield and a closed entry lead-in that helps prevent damage to the socket caused by a bent or misaligned signal pin without adversely affecting the impedance of the connector.

In some embodiments of the jack, the lead-in is defined at the distal end of a shroud formed of a dielectric material. The shroud has a tubular shroud portion with proximal and distal ends disposed coaxially around the socket and is radially spaced from both the socket and the shield. In some embodiments, one or more openings are formed laterally through the shroud.

In some embodiments of the jack, the shroud includes a rim extending radially inward from the distal end of tubular shroud portion and defining a frustoconical lead-in coaxially aligned with the socket.

In some embodiments of the jack, the proximal end of the tubular shroud portion is coupled with the cylindrical shield or some other part of the connector body.

In some embodiments of the jack, the shroud includes an annular base extending radially outward from the proximal end of the hollow tubular shroud body and coupled with the connector body.

In some embodiments of the jack, an annular groove is formed along an inner surface of the cylindrical shield and the annular base of the shroud is received within the annular groove.

In some embodiments of the jack, at least some of the openings in the shroud are longitudinally spaced along a

2

length of the tubular shroud portion, and/or annularly spaced about a circumference of the tubular shroud body.

In some embodiments of the jack, the openings are arranged in a plurality of longitudinal rows equiangularly spaced about a circumference of the tubular shroud body.

In some embodiments of the jack, the one or more openings are configured to modify a dielectric constant of the shroud to support 75Ω transmission of high-speed digital or RF signals.

In some embodiments, the frustoconical lead-in has a proximal opening with a diameter no more than 0.003" larger than the inner diameter of the tubular socket and a distal opening larger than the inner diameter of the tubular socket.

In some embodiments, the shroud is formed of a liquid crystal polymer.

In some embodiments, one or more board locks protrude from the connector body and include at least one outwardly biased resilient finger with a rearward-facing shoulder configured to engage a bottom surface of a printed circuit board when the board lock is inserted through a hole in the printed circuit board.

In some embodiments, a pair of board locks are arranged in diagonally opposed relation relative to a longitudinal axis of the jack, alone or in combination with one or more mounting pins or posts.

Embodiments of a second aspect of the present invention provide a DIN connector having a jack with a shroud as described above and a mating DIN plug having a second connector body with a second hollow cylindrical shield configured to be received in the space between the shroud and the first hollow cylindrical shield and to make electrical contact with the first shield; and a second contact having a pin disposed coaxially within the second hollow cylindrical shield and being configured to be received within and make electrical contact with the tubular socket when the plug is inserted into the jack.

Other aspects of the present invention provide a connector jack with a shroud as described above, and connectors utilizing such connector jacks.

The above and other aspects and embodiments are described below with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated herein and form part of the specification, illustrate various embodiments of the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the pertinent art to make and use the invention. In the drawings, like reference numbers indicate identical or functionally similar elements.

FIG. 1 is a sectional side view of a prior art DIN connector showing a DIN plug partially mated with a DIN jack.

FIG. 2 is a perspective view of a DIN jack according to an embodiment of the invention.

FIG. 3 is a sectional side view of the DIN jack shown in FIG. 1 taken along line 2-2.

FIG. 4 is a sectional side view of a shroud for use in a DIN jack according to an embodiment of the invention.

FIG. 5 is a bottom view of the DIN jack shown in FIGS. 2 and 3.

FIG. 6 is a plan view of a printed circuit board configured to mount the DIN jack shown in FIGS. 2, 3 and 5.

FIG. 7 is a sectional side view of a DIN 1.0/2.3 connector with a DIN jack according to an embodiment of the invention.

5

in some embodiments, in other embodiments the length is less than 0.5 inches). In some embodiments, the wall thickness of portion 248 ranges from 0.01 inches to 0.1 inches. In the embodiment shown, twelve circular openings 256 are formed through the shroud 216 in four longitudinal rows spaced equiangularly about the circumference of the shroud 216. In a preferred embodiment, each row includes three circular holes of 0.031 inch diameter spaced 0.05 inch apart center-to-center. In a preferred embodiment, counterpart openings 256 in adjacent rows are longitudinally aligned. The shroud 216 can be formed of any dielectric material that meets the thermal and mechanical requirements of the application. In particular, the shroud material is preferably hard enough for the lead-in to guide a misaligned pin to the socket without breaking and for the tubular shroud portion to resist bending when a misaligned pin slides against it. In addition, the shroud material preferably supports 75Ω transmission of high-speed digital (e.g., up to 6 Gbps) and radio frequency (RF) signals while maintaining RF signal return performance better than -25 dB to 5 GHz. In an embodiment, the invention supports up to 6 GHz and performance requirements per SMPTE-424 3 Gbit/s 3G-SDI broadcast signaling. In a preferred embodiment, the shroud 216 is formed of a dielectric material having a heat deflection temperature greater than 260° C. (more preferably, 280° C.) and a compression strength of at least 15 lbs (measured perpendicular to the longitudinal axis of the tubular shroud portion). In an embodiment, the shroud 216 is formed of a polyetherimide, such as Ultem 1000 (unfilled). In a preferred embodiment, the shroud 216 is formed of a liquid crystal polymer (LCP); and, more preferably, a glass-filled LCP, such as Zenite 6130LX BK010.

FIG. 6 shows an edge portion of a PCB 258 with two pairs of diagonally opposed mounting holes 260 and 262 to receive the board locks 236 and alignment posts 234, respectively. The mounting holes are spaced from the edge 264 of the PCB so that the proximal face 218 of the connector body 214 abuts the edge of the PCB when the board locks 236 and posts 234 are inserted through the mounting holes. The PCB also includes a small longitudinal trough 266 extending proximally from the edge of the PCB to receive the solder tail 244 when the DIN jack is mounted on the edge of the PCB. In an embodiment, the mounting holes are plated through holes. In an embodiment, the PCB is 0.063 inches thick. In an embodiment, at least some, and preferably all, of the mounting holes are plated through-holes.

In use, DIN jack 206 can be edge-mounted on a PCB by aligning the board locks 236 and posts 234 on the connector body 214 with corresponding holes in the PCB and pressing the jack and the PCB towards one another. As the jack and the PCB are pressed together, the tines of the board locks 236 will be deflected radially inwardly by the walls of the through holes and will spring radially outward once free from the hole to cause the PCB to be sandwiched between the bottom edges of the connector body 214 and the upwardly facing shoulders of the board locks 236. The spacing of the holes from the edge of the PCB also ensures that the proximal face 218 of the connector body 214 is closely adjacent to or in contact with the edge of the PCB, so that in combination with the board locks 236 and posts 234, the jack is held firmly in place and unable to move excessively in any direction. Once properly positioned, the solder tail 244 is preferably disposed within the trough formed at the edge of the board, between the connector arms, accessible for soldering. The jack 206 is then soldered to the board. The board lock feature also improves the manufacturing process by securing the jack so that there is no need to fixture a single jack or an array of jacks to the PCB during wave or reflow soldering. The board locks 236 also

6

reduce manufacturing time by increasing the efficiency of placement and holding the jack 206 securely to the circuit board while the PCB is handled and soldered. In an embodiment, the shroud is formed of a material with sufficient heat deflection temperature to avoid becoming misaligned during the soldering process.

It will be appreciated that the DIN jack 206 of the present invention can interface with a standard DIN plug 102 as shown in FIG. 7. The pin 104 of the DIN plug 102 is received within the tubular socket 242, and the cylindrical shield 110 of the plug is received within the gap between the shroud 216 and the cylindrical shield 112 of the jack.

A right angle DIN jack 306 according to another embodiment of the invention, for panel mounting on a printed circuit board, is shown in FIG. 8. The DIN jack 300 includes a hollow cylindrical shield 212, a tubular socket 242, and a shroud 216 like the DIN jack 206 shown in FIGS. 2-5; however, the connector body 314 and solder tail 344 are configured to facilitate panel mounting on a PCB. Specifically, the connector body 314 includes a cube-like proximal portion defining a single board mounting surface 320 laterally spaced from the central longitudinal axis 230 of the shield so that the jack interface (and the nut) is elevated from the surface of the PCB. In this embodiment, the solder tail 344 extends from the proximal face 318 of the connector body and bends 90 degrees downward towards to the PCB. A second insulator 368 holds the solder tail 344 in position between the board locks 236 and the posts 234. This DIN jack can be surface mounted on a PCB having mounting holes like the ones shown in FIG. 6, but with the addition of a central plated through-hole for the solder tail.

In another embodiment of the present invention, shown in FIG. 9, a DIN to BNC adapter 406 is provided. The adapter 406 includes a hollow cylindrical shield 212, a tubular socket 242, and a shroud 216 like the DIN jack 206 shown in FIGS. 2-5; however, proximal ends of the connector body 414 and the contact 408 are configured to define the shield 470 and socket 472 of a BNC jack.

In yet another embodiment, shown in FIG. 10, a DIN video jack 506 is provided. The DIN video jack 506 includes a hollow cylindrical shield 212, a tubular socket 242, and a shroud 216 like the DIN jack 206 shown in FIGS. 2-4; however, proximal ends of the connector body 514 and the contact 508 are configured to interface with high definition video equipment 574.

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. For example, while the shroud is shown as an integral, one-piece unit, it will be appreciated that the shroud can be made-up of multiple pieces that are bonded, fused, or otherwise connected together to form an integral unit. Also, while certain adapters are shown for converting between DIN and other interfaces, it will be appreciated that other adapters can be made using the DIN jack of the present invention. For example, the DIN jack can be used in a DIN jack to BNC plug. Further, while specific sheath openings are disclosed herein, it will be appreciated that other shapes, sizes, and/or numbers of openings can be used. Also, the arrangement of the openings can be modified. For example, the number of longitudinal rows of openings may be greater or fewer than shown, and the openings in adjacent rows may be longitudinally aligned as shown, or staggered. It will also be appreciated that, although the invention has been described with reference to the DIN 1.0/2.3 interface, the present invention may be embodied in other types of jacks and connector interfaces used in high-speed digital and RF applications. Additionally,

from said proximal end of said hollow tubular shroud body and said annular base is coupled with said first connector body.

19. The DIN connector of claim 18, wherein an annular groove is formed along an inner surface of said first cylindrical shield and said annular base of said shroud is received within said annular groove.

20. The DIN connector of claim 16, wherein the second radial gap ranges between 0.005 and 0.015 inches and the third radial gap ranges between 0.015 and 0.025 inches.

21. The DIN connector of claim 16, wherein at least some of said openings are longitudinally spaced along a length of said tubular shroud portion.

22. The DIN connector of claim 16, wherein at least some of said openings are annularly spaced about a circumference of said tubular shroud body.

23. The DIN connector of claim 20, wherein the thickness of the tubular shroud portion is about 0.010 inches.

24. The DIN connector of claim 16, wherein said one or more openings are configured to modify a dielectric constant of said shroud to support 75Ω transmission of high-speed digital and RF signals.

25. The DIN connector of claim 16, wherein said distal end of said tubular socket has an inner diameter and wherein said frustoconical lead-in has a proximal opening with a diameter no more than 0.003" larger than said inner diameter of said

tubular socket and a distal opening larger than said inner diameter of said tubular socket.

26. The DIN connector of claim 16, wherein said shroud is formed of a material having a heat deflection temperature greater than 260° C. and a compression strength of at least 15 lbs.

27. The DIN connector of claim 16, wherein said shroud is formed of a liquid crystal polymer.

28. The DIN connector of claim 16, wherein said first connector body further includes a plane surface and one or more board locks protruding from said plane surface, each of said one or more board locks including at least one outwardly biased resilient finger with a rearward-facing shoulder configured to engage a bottom surface of a printed circuit board when said board lock is inserted through a hole in the printed circuit board.

29. The DIN connector of claim 28, wherein said first connector body includes a pair of said one or more board locks arranged in diagonally opposed relation relative to a longitudinal axis of said plane surface.

30. The DIN connector of claim 29, wherein said first connector body includes one or more mounting pins protruding from said plane surface in diagonally opposed relation to said one or more board locks.

* * * * *