

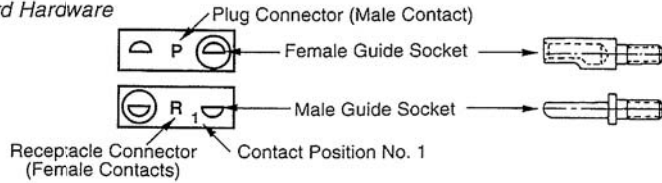
Mounting Hardware - Polarization

GUIDE PINS AND SOCKET TYPE Y "D" SHAPED

ORDERING INFORMATION

Hardware will be permanently epoxied in place after assembled in the connector. For Hardware not permanently epoxied, order -0. Guide pins and sockets will have -01 orientation. Polarization position in Continental Connector Company part number will be left blank.





Standard Hardware



Polarization Orientation

| | | | | | | | |
|----|-----|-----|-----|-----|-----|-----|-----|
| 01 | 09 | -17 | -25 | -33 | -41 | -49 | -57 |
| 02 | -10 | -18 | -26 | -34 | -42 | -50 | -58 |
| 03 | -11 | -19 | -27 | -35 | -43 | -51 | -59 |
| 04 | -12 | -20 | -28 | -36 | -44 | -52 | -60 |
| 05 | -13 | -21 | -29 | -37 | -45 | -53 | -61 |
| 06 | -14 | -22 | -30 | -38 | -46 | -54 | -62 |
| 07 | -15 | -23 | -31 | -39 | -47 | -55 | -63 |
| 08 | -16 | -24 | -32 | -40 | -48 | -56 | -64 |

OPTIONAL GUIDE PINS

| Male Pin | Female Socket | Male Pin | Female Socket |
|---|--|---|---|
| Straight Through Connector Body | | Right Angle Connector Body | |
| URR-MM ■ URR-FM | UMR-MF ■ UER-MF | URR-FM | UMR-FF ■ UMR-MF |
|  <p>.0625 Dia. Typ. .225 Typ.</p> <p>Stainless Steel Polarizing Pin Location Optional In Any Contact Position (Typ.)</p> |  <p>Omit Female Contact On Mating Connector</p> |  <p>Drill To .067 Dia. To Accommodate Polarizing Pin</p> |  |
| To order guide pins installed in body (style male pin or female socket), specify: PX (X = position numbers) Position number with Pol Pin instead of contact. Example: UMR026MF3KMP05 | | To order body (style male pin or female socket), without contact, specify: EX (X = position numbers) Position number without contact. Example: URR026FM3SLE05 | |

