


REV	DESCRIPTION	BY DATE	APPD
A	ECR 7437	B 10/17/00	JMC

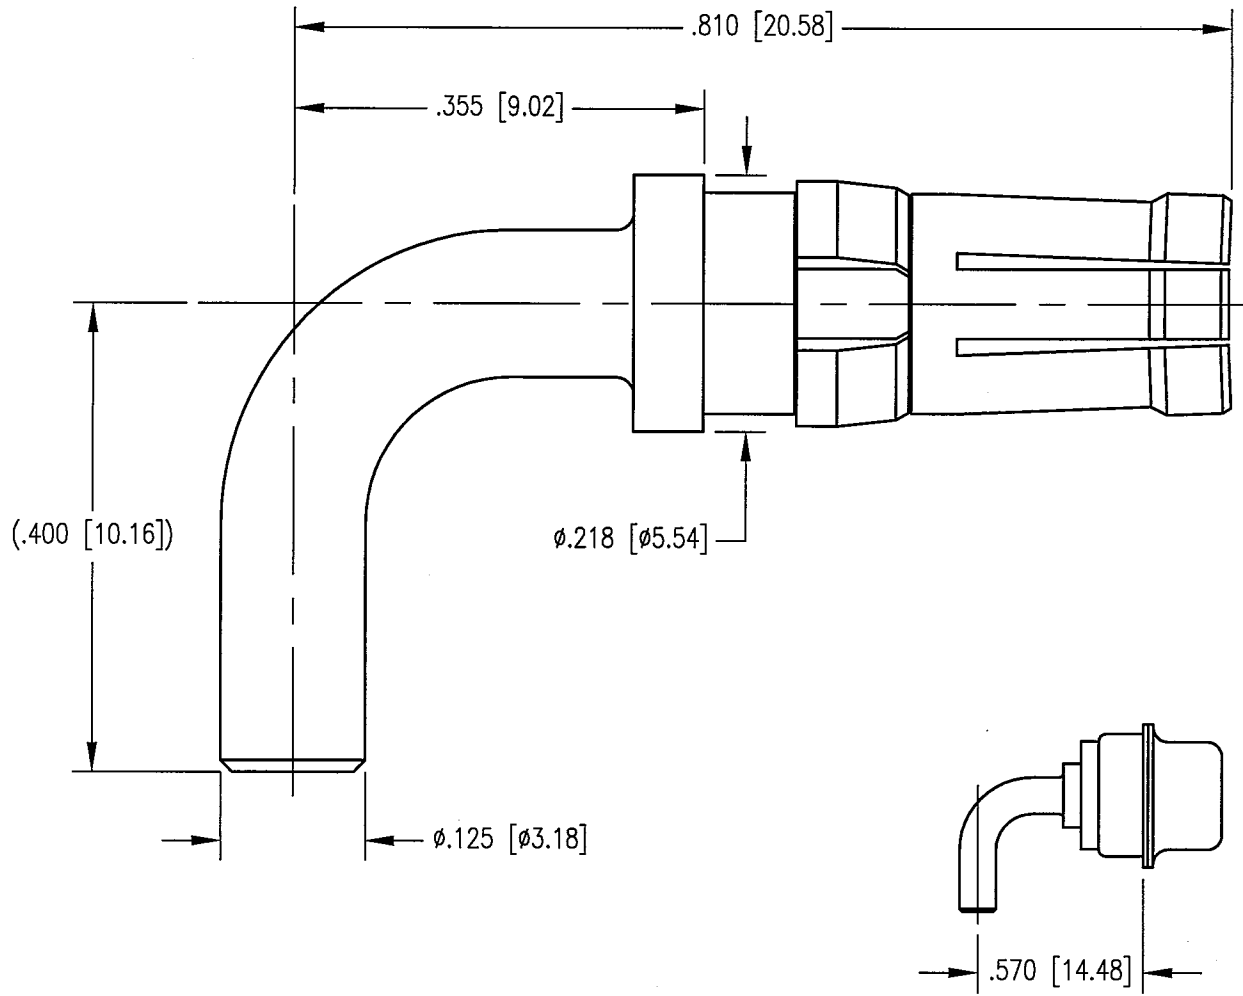

NOTES:

- MATERIALS:  
 BODY: COPPER ALLOY  
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
- FINISH:  
 BODY: .000030 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290  
 OVER COPPER FLASH
- ELECTRICAL:  
 CURRENT RATING: 40 AMPS
- DESIGNED FOR USE IN A .125" THICK PC BOARD.

PER ASME Y14.5M-1994  
 UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:  
 DECIMALS .xx ± .01 [0.254]  
 .xxx ± .005 [0.127]  
 ANGLES ± 2°

SCALE: 6:1

<b>CUSTOMER DRAWING</b>			
DRAWN	DATE	CHECKED	DATE
JED	10/17/00	BBB	3/2/99
APPROVED	DATE	APPROVED	DATE
JMC	3/2/99	JMC	3/2/99

**NORTHROP GRUMMAN**  
 Winchester Electronics 400 Park Road  
 Watertown, CT 06795

TITLE  
 RDM HIGH POWER RECEPTACLE

A	223-010-0010G	SMT.	OF	REV.
		1	1	A